


# FEI-360IPN-V3

## IR 6MP Vandal-Proof Fish-Eye Camera

Ideal for large open spaces, this 6MP Panoramic Fisheye Anti-Vandal camera can capture footage at a wide angle of 360°. The camera includes a built-in microphone, Digital WDR, BLC, HLC, and 3D-DNR for poor light conditions. Our Fisheye camera FEI-360IPN can do the work of multiple fixed focus lens cameras.

6  
MP

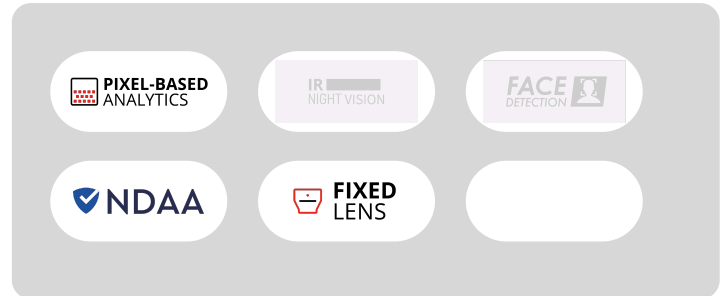

## MAIN FEATURES

- FEI-360IPN-V3
- Sensor: 1/2.9" CMOS (2160 x 2160 – 16:9)
- Resolution: 2160×2160 (1:1) 25/30FPS (6MP)
- Lens: 1.65mm (360° for Ceiling Mount / 180° For Wall Mount)
- True Day&Night – ICR
- Illumination: 15m (4 High-Power LEDs)
- Compression: H.265+ / H.264+ / H.265 / H.264 / MJPEG
- No
- Digital WDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- Alarm in + Alarm out
- Built-In Microphone + Audio Input + Audio Output
- ONVIF:
- Water Proof: IP67
- Weight: ~530g
- Power: DC12V/~450mA / PoE/~7W



<https://provision-isr.com>

## SPECIFICATIONS

NDAA Compliant	
NDAA Compliant	Yes
Video	
Image Sensor	1/2.9" CMOS (2160 x 2160 - 16:9)
Effective Pixels	2160x2160 (1:1)
Electronic Shutter	1/25s ~ 1/100000s
Day & Night	ICR
Min. Illumination	0.1lux (@F2.0, AGC on) 0lux with IR on
Audio	
Audio compression	G.711A/G.711U
Communication	Two-Way Audio
Image	
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	360
Privacy Zone	Yes
Events and Analytics	
Analytics	No
Motion Detection	Yes
Compression	
Resolution	6MP(3200x1800), 5MP(2160x2160), 2MP(1440x1440), 2MP(1920x1080), 960x960, 480x480
Frame Rate	1-25/30FPS
Video Compression	H.265+/ H.264+ / H.265 / H.264 / MJPEG**

<b>Multi-Stream</b>	Master Stream: 6MP(3200x1800), 5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440) (1~30fps) Substream: 960x960, 480x480 (1~30fps) Third Stream: 960x960, 480x480 (1~30fps)
<b>Bit Rate</b>	64Kbps ~ 6Mbps@H.265 / 64Kbps ~ 6Mbps@H.264
<b>Encode Mode</b>	VBR/CBR
<b>Image Quality</b>	Five levels under VBR; Free adjustment under CBR

<b>Lens</b>	
<b>Lens (Field of View)</b>	1.65mm (360° for Ceiling Mount / 180° For Wall Mount)
<b>Iris</b>	Fixed Iris
<b>Lens Mount</b>	M12 Mount

<b>Network</b>	
<b>User Access</b>	Supports simultaneous monitoring of up to 6 users with multi-stream real-time transmission
<b>Network Protocol</b>	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
<b>Remote Monitoring</b>	IE Browsing, Ossia VMS Software, Provision Cam2 Mobile App
<b>Ethernet</b>	100Mbps

<b>Connectivity</b>	
<b>Network</b>	RJ45 (+PoE)
<b>Audio Connectivity</b>	Built-In Microphone + Audio Input + Audio Output
<b>Alarm</b>	Alarm in + Alarm out
<b>SD Card</b>	Event/Schedule based Main/Substream recording (Up to 256GB)
<b>Wiegand</b>	Yes
<b>Power</b>	DC Socket
<b>Analog Video Output</b>	CVBS (BNCx1)

<b>Housing</b>	
<b>PoE</b>	Yes

<b>Illumination</b>	15m (4 High-Power LEDs)
<b>Power Supply</b>	DC12V/~450mA / PoE/~7W
<b>Protection Rate</b>	Water Proof: IP67
<b>Work Environment</b>	-30°C~60°C, 10%~90% Humidity
<b>Bracket</b>	No
<b>Dimensions</b>	Φ130mm×46mm
<b>Weight (gross)</b>	~530g
<b>Hard Reset Button</b>	Yes