

Eye-Sight



This series is designed for security professionals and offers superior image quality, advanced AI analytics, seamless connectivity, and unparalleled insight and protection, with options and configurations to meet specific needs. The Check Point Quantum IoT Nano and DDA2 Analytics provide detailed attribute analysis and advanced threat prevention.



I6-320IPE-MVF

60m IR 2MP DDA Analytics Motorized Lens Large Bullet Camera

Equipped with a 2.8-12mm motorized lens, this 2MP bullet camera is designed for long distance surveillance (up to 60m) in both indoor and outdoor scenarios. The camera offers broad possibilities for Analytics, from Face Detection all the way to the outstanding DDA Analytics (Detect, Distinguish, Alert) which has the ability to perform both Object Recognition and Object Counting. With a various of detection rules and triggers, I4-320IPE-MVF camera will help to put an end to false alarms.

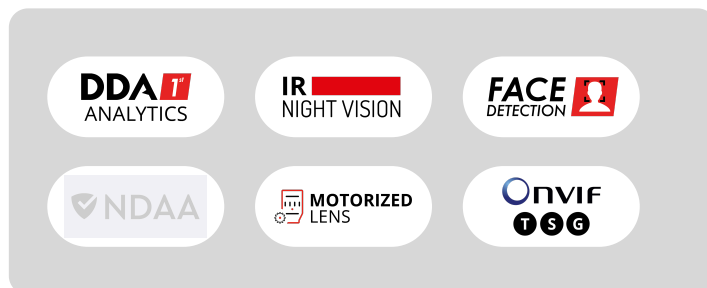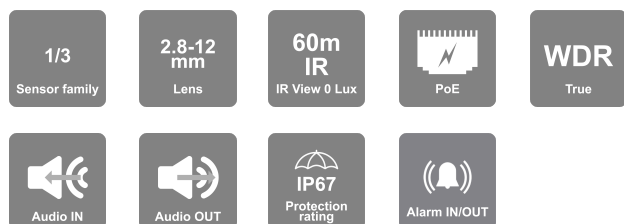

MAIN FEATURES

- I6-320IPE-MVF
- Sensor: 1/2.8" CMOS (16:9)
- Resolution: 1920x1080 25/30FPS (2MP)
- Lens: 2.8-12mm MVF with Auto Focus (103°-32°)
- True Day&Night – ICR
- Illumination: 60m (4 High-Power IR LED)
- Compression: H.265+/ H.264+ / H.265 / H.264 / MJPEG
- General Analytics: Camera Tampering
- AI (Object Recognition): DDA Sterile Area, DDA Line Crossing, DDA Object Counting
- AI (Face Detection): 10 Faces per frame
- True WDR (120dB), BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 128Gb)
- Alarm in + Alarm Out
- Audio input + Audio output
- ONVIF: Profile T/S/G
- Water Proof: IP67
- Weight: ~1040g
- Power: DC12V/~910mA / PoE/~8.2W



<https://provision-isr.com>

SPECIFICATIONS

| 3rd Party Cyber Protection | |
|----------------------------|---|
| General | N/A |
| Protection Methods | N/A |
| NDAA Compliant | |
| NDAA Compliant | No |
| Video | |
| Image Sensor | 1/2.8" CMOS (16:9) |
| Effective Pixels | 1920x1080 |
| Electronic Shutter | 1/25s ~ 1/100000s |
| Day & Night | ICR |
| Min. Illumination | Day: 0.1lux / Night: 0.005lux (@F1.6, AGC On) 0lux with IR on |
| Audio | |
| Audio compression | G.711A/G.711U |
| Communication | Two-Way Audio |
| Image | |
| Image Settings | AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable |
| Image Enhancement | True WDR (120dB), BLC, HLC, ROI |
| Noise Reduction | 3D-DNR |
| Image Orientation | Mirror/Flip |
| Privacy Zone | Yes |
| Events and Analytics | |
| Analytics | General Analytics: Camera Tampering AI (Object Recognition): DDA Sterile Area, DDA Line Crossing, DDA Object Counting AI (Face Detection): 10 Faces per frame |
| Motion Detection | Yes |
| Compression | |
| Resolution | 2MP / 1MP / D1 (704x576) / QVGA (480x240) / CIF (352x288) |

| | |
|--------------------------|---|
| Frame Rate | 1-25/30FPS |
| Video Compression | H.265+/ H.264+ / H.265 / H.264 / MJPEG** |
| Multi-Stream | Master Stream: 2MP (1920x1080) / 1MP (1280x720) (1~30fps) Sub-Stream: 1MP/QVGA/D1/CIF Third Stream: QVGA/D1/CIF (1~30fps) |
| Bit Rate | 64Kbps ~ 4Mbps@H.265 / 64Kbps ~ 6Mbps@H.264 |
| Encode Mode | VBR/CBR |
| Image Quality | Five levels under VBR; Free adjustment under CBR |

| Lens | |
|-----------------------------|---|
| Lens (Field of View) | 2.8-12mm MVF with Auto Focus (103°-32°) |
| Iris | DC Iris |
| Lens Mount | Ø14 Mount |

| Network | |
|--------------------------|--|
| User Access | Supports simultaneous monitoring for up to 3 users with multi-stream real time transmission |
| Network Protocol | IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS |
| Remote Monitoring | IE Browsing, VMS Software, Provision Cam2 Mobile App |
| Ethernet | 100Mbps |
| ONVIF | Profile T/S/G |

| Connectivity | |
|----------------------------|---|
| Network | RJ45 (+PoE) |
| Audio Connectivity | Audio input + Audio output |
| Alarm | Alarm in + Alarm Out |
| SD Card | Event/Schedule based Main/Substream recording (Up to 128Gb) |
| Wiegand | No |
| Power | DC Socket |
| Analog Video Output | CVBS out + Technician Port |

| Housing | |
|-------------------|------------------------------|
| PoE | Yes |
| Illumination | 60m (4 High-Power IR LED) |
| Power Supply | DC12V/~910mA / PoE/~8.2W |
| Protection Rate | Water Proof: IP67 |
| Work Environment | -30°C~60°C, 10%~90% Humidity |
| Bracket | 3-Axis Wall Bracket |
| Dimensions | 271.8x92.4x79.4mm |
| Weight (gross) | ~1040g |
| Hard Reset Button | Yes |

DIMENSIONS

